


Identification Numbers

Your car has several identifying numbers located in various places.


The Vehicle Identification Number (VIN) is the 17-digit number your Honda dealer uses to register your car for warranty purposes. It is also necessary for licensing and insuring your car. The easiest place to find the VIN is on a plate fastened to the top of the dashboard. You can see it by looking through the windshield on the driver's side. It is also on the Certification label attached to the driver's doorjamb, and is stamped on the engine compartment bulkhead. The VIN is also provided in bar code on the Certification label.

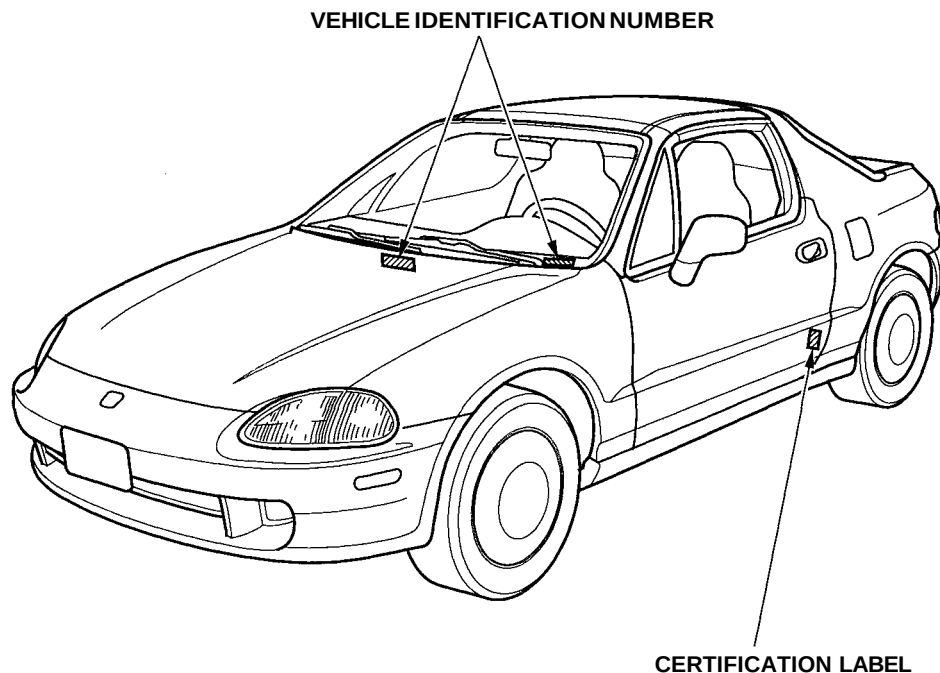

Identification Numbers

The Engine Number is stamped into the engine block.

The Transmission Number is on a label on top of the transmission.

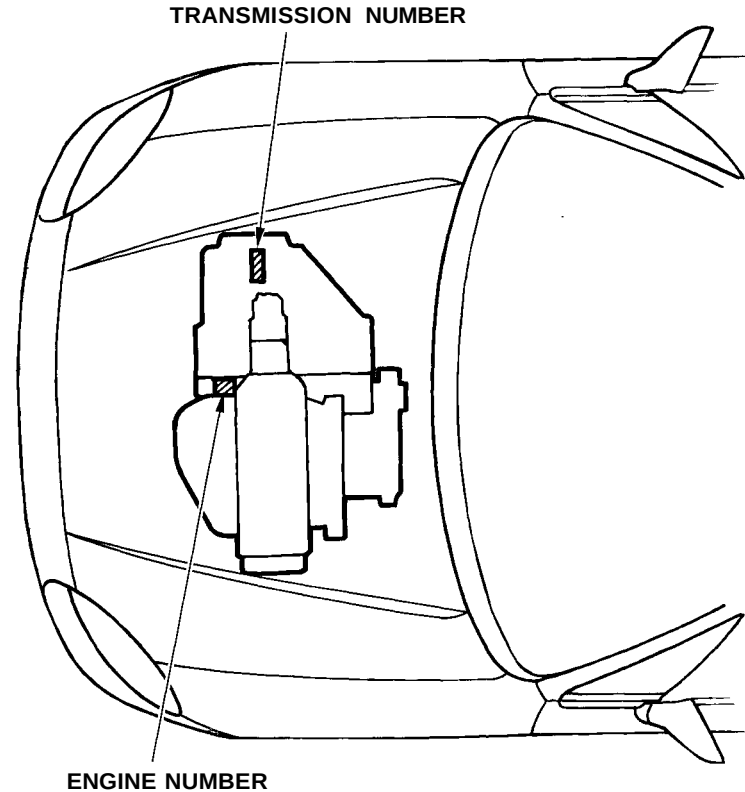

Specifications

Dimensions

Length		4,005 mm (157.7 in)
Width		1,695 mm (66.7 in)
Height		1,255 mm (49.4 in)
Wheelbase		2,370 mm (93.3 in)
Track	Front	1,475 mm (58.1 in)
	Rear	1,465 mm (57.7 in)

Weights

Gross vehicle weight rating	See the certification label attached to the driver's doorjamb.
-----------------------------	--

Engine

Type	Water cooled 4-stroke SOHC ^{*1} , SOHC VTEC ^{*2} , DOHC VTEC ^{*3} 4-cylinder gasoline engine
Bore x Stroke	75.0 x 90.0 mm (2.95 x 3.54 in) ^{*1 *2} 81.0 x 77.4 mm (3.19 x 3.05 in) ^{*3}
Displacement	1,590 cm ³ (97.0 cu-in) ^{*1 *2} 1,595 cm ³ (97.3 cu-in) ^{*3}
Compression ratio	9.4 : 1 ^{*1} 9.6 : 1 ^{*2} 10.2 : 1 ^{*3}
Spark plugs	See spark plug maintenance section page 146.

Capacities

Fuel tank		Approx. 11.9 US gal (45 ℓ, 9.9 Imp gal)
Engine coolant	Change ^{*1}	0.82 US gal (3.1 ℓ, 0.68 Imp gal)
	Manual	1.19 US gal (4.5 ℓ, 0.99 Imp gal) ^{*4}
	Automatic	0.79 US gal (3.0 ℓ, 0.66 Imp gal) ^{*2} 0.85 US gal (3.2 ℓ, 0.70 Imp gal) ^{*3}
	Total	1.11 US gal (4.2 ℓ, 0.92 Imp gal)
	Manual	1.32 US gal (5.0 ℓ, 1.10 Imp gal) ^{*4}
Engine oil	Automatic	1.08 US gal (4.1 ℓ, 0.90 Imp gal) ^{*2} 1.14 US gal (4.3 ℓ, 0.95 Imp gal) ^{*3}
	Change ^{*5}	3.5 US qt (3.3 ℓ, 2.9 Imp qt)
	Including filter	4.2 US qt (4.0 ℓ, 3.5 Imp qt) ^{*4}
	Without filter	3.2 US qt (3.0 ℓ, 2.6 Imp qt)
	Total	3.9 US qt (3.7 ℓ, 3.3 Imp qt) ^{*4} 4.2 US qt (4.0 ℓ, 3.5 Imp qt) 5.1 US qt (4.8 ℓ, 4.2 Imp qt) ^{*4}
Manual transmission fluid	Change	1.9 US qt (1.8 ℓ, 1.6 Imp qt)
		2.4 US qt (2.3 ℓ, 2.0 Imp qt) ^{*4}
	Total	2.0 US qt (1.9 ℓ, 1.7 Imp qt) 2.5 US qt (2.4 ℓ, 2.1 Imp qt) ^{*4}
Automatic transmission fluid	Change	2.9 US qt (2.7 ℓ, 2.4 Imp qt)
	Total	6.2 US qt (5.9 ℓ, 5.2 Imp qt)
Windshield washer reservoir	U.S. Cars	2.6 US qt (2.5 ℓ, 2.2 Imp qt)
	Canadian Cars	4.8 US qt (4.5 ℓ, 4.0 Imp qt)

* 1 : Including the coolant in the reserve tank and that remaining in the engine.

Reserve tank capacity: 0.11 US gal (0.4 ℓ, 0.09 Imp gal)

* 2 : S * 3 : Si * 4 : VTEC

* 5 : Excluding the oil remaining in the engine.

Air Conditioning

Refrigerant type	HFC-134a (R-134a)
Charge quantity	17.6 – 19.4 oz (500 – 550 g)
Lubricant type	SP-10

Lights

Headlights (HI/LO)	12 V – 60/55 W (HB2)
Front turn signal/ Side marker/Parking lights	12 V – 43/3 CP (SAE 3496)
Rear turn signal lights	12 V – 32 CP (SAE 1156)
Stop/Taillights	12 V – 32/2 CP (SAE 2057)
Rear side marker lights	12 V – 3 CP (SAE 168)
Back-up lights	12 V – 32 CP (SAE 1156)
License plate lights	12 V – 8 W
Interior light	12 V – 5 W
Trunk light	12 V – 3.4 W

Battery

Capacity	12 V – 36 AH/5 HR 12 V – 47 AH/20 HR
----------	---

Fuses

Interior	See page 194 or the fuse label attached to the inside of the fuse box door under the dashboard.
Under-hood	See page 195 or the fuse box cover.

Alignment

Toe-in	Front	0.0 mm (0.00 in)
	Rear	2.0 mm (0.08 in)
Camber	Front	–15'
	Rear	–20' *
Caster	Front	–30'
	Rear	1°10'

* : VTEC

Tires

Size	Front/Rear	P175/70R13 82S *1 P185/60R14 82H *2 P195/60R14 85V *3
	Spare	T105/80D13 *4 T135/70D15 *5
Pressure	Front/Rear	32 psi (220 kPa, 2.2 kgf/cm ²)*1 29 psi (200 kPa, 2.0 kgf/cm ²)*2 *3
	Spare	60 psi (420 kPa, 4.2 kgf/cm ²)

* 1 : S

* 2 : Si

* 3 : VTEC

* 4 : U.S.: S, Si without ABS, Canada : Si

* 5 : VTEC, U.S. Si with ABS