


Identification Numbers

Your car has several identifying numbers located in various places.


The Vehicle Identification Number (VIN) is the 17-digit number your Acura dealer uses to register your car for warranty purposes. It is also necessary for licensing and insuring your car. The easiest place to find the VIN is on a plate fastened to the top of the dashboard. You can see it by looking through the windshield on the driver's side. It is also on the Certification label attached to the driver's doorjamb, and is stamped on the engine compartment bulkhead behind the engine. The VIN is also provided in bar code on the Certification label.

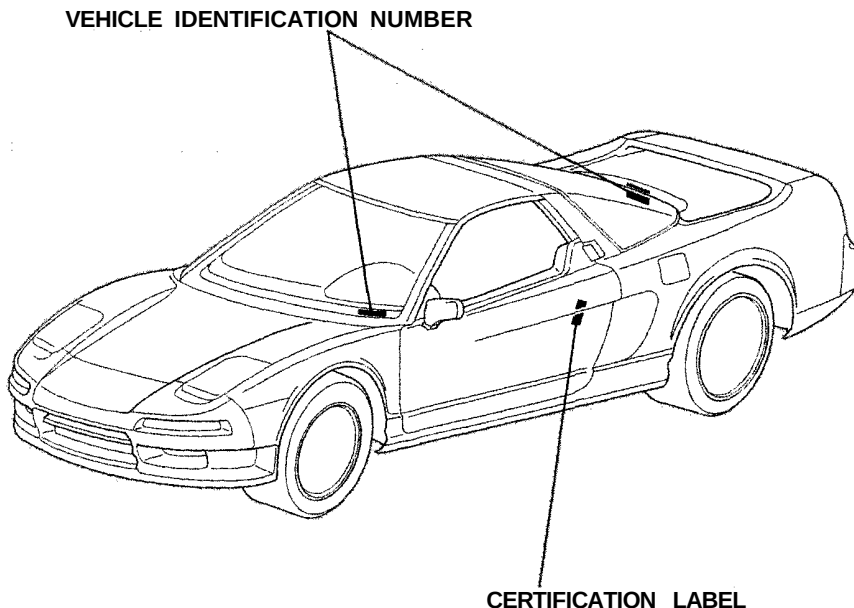

Identification Numbers

The Engine Number is stamped on the back left corner of the engine block, below the rear valve cover.

The Transmission Number is on a label on top of the transmission.

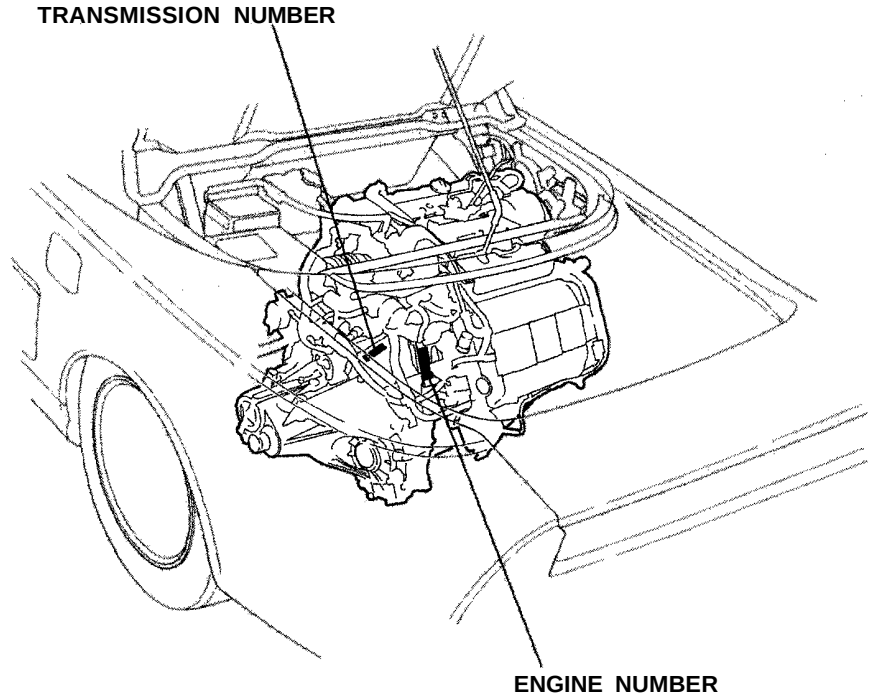

Specifications

Dimensions		
Length		4,425 mm (174.0 in)
Width		1,810 mm (71.3 in)
Height		1,175 mm (46.3 in)
Wheelbase		2,530 mm (99.6 in)
Track	Front	1,510 mm (59.4 in)
	Rear	1,530 mm (60.2 in)

Weights	
Gross vehicle weight rating	See the Certification label attached to the driver's door-jamb.

Air Conditioning	
Refrigerant type	HFC-134a (R-134a)
Charge quantity	800–850 g (28.2–30.0 oz)
Lubricant type	ND-OIL8

Capacities		
Fuel tank		Approx. 70 ℓ (18.5 US gal. 15.4 Imp gal)
Engine coolant	Change* ¹	12.0 ℓ (12.7 US qt 10.6 Imp qt)
	Total Manual	16.0 ℓ (16.9 US qt 14.1 Imp qt)
	Automatic	16.5 ℓ (17.4 US qt 14.5 Imp qt)
Engine oil	Change* ²	
	Including filter	5.0 ℓ (5.3 US qt 4.4 Imp qt)
	Without filter	4.3 ℓ (4.5 US qt 3.8 Imp qt)
	Total	6.3 ℓ (6.7 US qt 5.5 Imp qt)
Manual transmission oil	Change	2.7 ℓ (2.9 US qt 2.4 Imp qt)
	Total	2.8 ℓ (3.0 US qt 2.5 Imp qt)
Automatic transmission fluid	Change	2.9 ℓ (3.1 US qt 2.6 Imp qt)
	Total	7.0 ℓ (7.4 US qt 6.2 Imp qt)
Windshield washer reservoir	U.S. Cars	2.5 ℓ (2.6 US qt 2.2 Imp qt)
	Canadian Cars	4.0 ℓ (4.2 US qt 3.5 Imp qt)

★1: Including the coolant in the expansion tank (2.1ℓ/2.2 US qt/1.8 Imp qt) and that remaining in the engine.

★2: Excluding the oil remaining in the engine.

Specifications

Lights		
Headlights	High	12V – 65W (HB3) 12V – 60W (HB3)
	Low	12V – 55W (HB4) 12V – 51W (HB4)
Daytime Running Lights		12V – 32CP
Front turn signal lights		12V – 45CP (SAE 3497)
Front Parking lights		12V – 6CP (SAE 3652)
Rear turn signal lights		12V – 45CP (SAE 3497)
Stop/Taillights		12V – 32/2CP (SAE 2057)
Taillights		12V – 2CP (SAE 194)
Side marker lights	Front	12V – 3CP (SAE 168)
	Rear	12V – 3CP (SAE 168)
Back-up lights		12V – 32CP (SAE 1156)
License plate lights		12V – 8W
Interior light		12V – 5W
Trunk light		12V – 3.4W
Door courtesy lights		12V – 3.4W

Battery		
Capacity	Manual transmission	12V – 52AH/5HR
	Automatic transmission	12V – 55AH/5HR

Fuses	
Front compartment	See page 220 or the fuse box cover.
Interior	See page 221 or the fuse label attached to the inside of the fuse box door under the dashboard.
Engine compartment	See page 221 or the fuse box cover.

Engine	
Type	Water cooled 4-stroke DOHC VTEC V-6 gasoline engine
Bore × Stroke	90.0 × 78.0 mm (3.54 × 3.07 in)
Displacement	2,977 cm ³ (182 cu in)
Compression ratio	10.2 : 1
Spark plugs	See spark plug maintenance section page 163 .

Alignment		
Toe	Front	out 3.5 mm (0.14 in.)
	Rear	in 4.0 mm (0.24 in)
Camber	Front	–0° 20'
	Rear	–1° 30'
Caster	Front	8°

Tires		
Size	Front	215/45 ZR 16
	Rear	245/40 ZR 17
	Folding Spare Tire	165/80 D 15
Pressure	Front	230 kPa (2.3 kg/cm ² , 33 psi)
	Rear	275 kPa (2.8 kg/cm ² , 40 psi)
	Folding Spare Tire	Front: 180 kPa (1.8 kg/cm ² , 26 psi) Rear: 220 kPa (2.2 kg/cm ² , 32 psi)