


## Fuses

Fuse boxes are installed on the left underside of the instrument panel and the right side of the engine compartment. Each fuse box contains spare fuse cartridges.

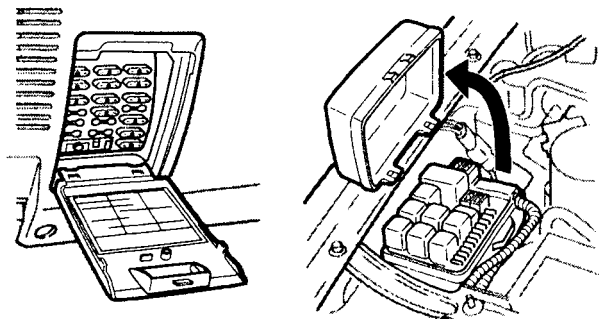

### NOTICE

*Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system. If you do not have a replacement fuse with the proper rating for the circuit, install one with a lower rating.*

## Fuse Box: Instrument Panel

| Amperage               |     | Applicability                                 |
|------------------------|-----|-----------------------------------------------|
| 1                      | 10A | Tail, Parking, Sidemarker, Illumination light |
| 2                      | 10A | Stop light                                    |
| 3                      | 10A | Dome                                          |
| 4                      | 25A | Rear defogger                                 |
| 5                      | 10A | TCM (V6-3.2L)                                 |
|                        | 20A | Fuel pump (L4-2.6L)                           |
| 6                      | 15A | Wipers, Washer                                |
| 7                      | 10A | Turn signal lights, Gauge                     |
| 8                      | 10A | AC generator, Back-up light                   |
| 9                      | 15A | Ignition coil                                 |
| 10                     | 10A | Rear wiper                                    |
| 11                     | 10A | Starter                                       |
| 12                     | 15A | Lighter, Radio                                |
| 13                     | 20A | Rear wheel anti-lock                          |
| Circuit breaker<br>30A |     | Power window                                  |

## Fuse Box: Engine Compartment

| Amperage |              | Applicability                                 |
|----------|--------------|-----------------------------------------------|
| 1        | 15A (4-cyl.) | ECM                                           |
|          | 10A (V6)     | O <sub>2</sub> Sensor                         |
| 2        | 20A          | Fuel pump                                     |
| 3        | 15A          | Hazard warning light                          |
| 4        | 10A          | Horn                                          |
| 5        | 10A          | Charge light                                  |
| 6        | 10A          | A/T lock (V6), O <sub>2</sub> Sensor (4-cyl.) |
| 7        | 20A          | Heater                                        |
| 8        | 10A          | Air conditioner                               |
| 9        | 10A          | Headlight; Right                              |
| 10       | 10A          | Headlight; Left                               |

## Light Bulbs

| Application                 | Bulb No. | Quantity | Rating<br>Candlepower |
|-----------------------------|----------|----------|-----------------------|
| Front Lights                |          |          |                       |
| Headlight — Halogen         | 9004     | 2        | 65/45 watts           |
| Turn signal & Parking light | 1034     | 2        | 3/32                  |
| Sidemarkers                 | 194      | 2        | 2                     |
| Rear Lights                 |          |          |                       |
| Back-up                     | 1156     | 2        | 32                    |
| License                     | —        | 2        | 5 watts               |
| Tail, Stop & Sidemarkers    | 1157     | 2        | 3/32                  |
| Turn signal                 | 1156     | 2        | 32                    |
| High-mounted stop light     | —        | 4        | 5 watts               |
| Interior Illumination       |          |          |                       |
| A/C-heater cont.            | 74       | 1        | 1.4                   |
| Dome light                  | —        | 1        | 10 watts              |
| Instrument cluster          | 158/74   | 3/6 or 2 | 2/1.4                 |
| Stop light                  | —        | 2        | 5 watts               |
| Luggage light               | —        | 1        | 10 watts              |
| Step light                  | —        | 4        | 5 watts               |

## Dimensions and Weights

|                                 | Model       | 2WD                    | 4WD                    |
|---------------------------------|-------------|------------------------|------------------------|
| Wheelbase                       | —           | 2,760 mm (108.6 in.)   |                        |
| Overall Length                  | P225/75R15  | 4,670 mm (183.8 in.)   |                        |
|                                 | P245/70R16  | 4,690 mm (184.6 in.)   |                        |
| Overall Width                   | P225/75R15  | 1,690 mm (66.5 in.)    |                        |
|                                 | P245/70R16  | 1,740 mm (68.5 in.)    |                        |
| Overall Height<br>(At curb Wt.) | P225/75R15  | 1,690 mm (66.5 in.)    |                        |
|                                 | P245/70R16  | 1,740 mm (68.5 in.)    |                        |
| Tread Front                     | P225/75R15  | 1,440 mm (56.7 in.)    |                        |
|                                 | P245/70R16  | 1,465 mm (57.6 in.)    |                        |
| Tread Rear                      | P225/70R15  | 1,445 mm (56.9 in.)    |                        |
|                                 | P245/70R16  | 1,475 mm (58.0 in.)    |                        |
| GVWR                            | 2.6L engine | 2,065 kg<br>(4,550 lb) | —                      |
|                                 | 3.2L engine | 2,110 kg<br>(4,650 lb) | 2,220 kg<br>(4,900 lb) |

**Note:** GVWR — Gross Vehicle Weight Rating