

Fuel Tank Capacity

21.9 U.S. gallons (83 liters)

Front Suspension

Independent wishbone arms, torsion bar springs with stabilizer bar.

Front Wheel Alignment

Toe-in	2 ± 2 mm (0.08 in.)	—
Camber	$30' \pm 60'$	No more than 45' side-to-side variation
Caster	$2^{\circ}20' \pm 45'$	No more than 35' side-to-side variation

Rear Suspension

Semi-elliptic, rubber bushed, leaf type springs and direct double-acting shock absorbers.

Steering

Recirculating ball.

Service Brake

Hydraulic Front: Disc brake.

Rear: Self-adjusting drum brake,
leading-trailing (4-cyl. engine)
Disc brake (V6 engine)

Parking Brake

Mechanical, operating on rear wheels (4-cyl. engine).

Mechanical, drum in disc, duo-servo, manual-adjusting, operating on rear wheels (V6 engine).

Battery

Models	2.6L Engine	3.2L Engine
Voltage (V)	12	12
Cold-cranking performance (Amp)	430	600
Reserve capacity (Min.)	90	125
BCI group no.	86	24

Rear Axle

Models		2WD		4WD
		2.6L	3.2L	
Gear ratio	225/75R16	4.555	4.300	4.300
	245/70R16	—		4.300
Lubricant capacity		1.95 U.S. quarts (1.85 liters)	1.87 U.S. quarts (1.77 liters)	

Front Axle (4WD Model)

Gear ratio	4.300
Lubricant capacity	1.6 U.S. quarts (1.5 liters)

Shift-on-the-Fly System


Lubricant capacity	0.13 U.S. quarts (0.12 liters)
--------------------	--------------------------------

Wheels and Tires

Tire size	225/75R16	245/70R16
Wheel size	16 x 6JJ	16 x 7JJ
Tire pressure		
	Front psi (kPa)	26 (180)
	Rear psi (kPa)	26 (180)
Wheel nut tightening torque	Aluminum wheel: 87 lb·ft (118 N·m) Steel wheel: 65 lb·ft (89 N·m)	

Fuses

Fuse boxes are installed on the left side of the instrument panel and the right side of the engine compartment. Each fuse box contains spare fuse cartridges.

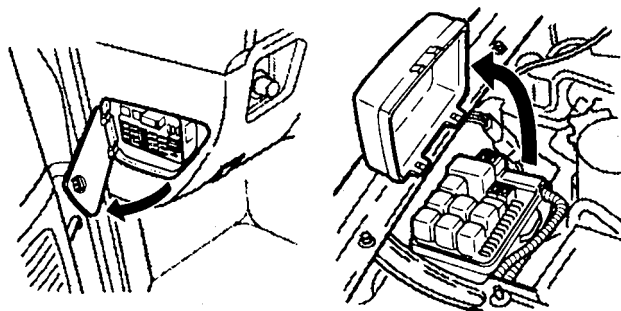

NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system. If you do not have a replacement fuse with the proper rating for the circuit, install one with a lower rating.

Fuse Box: Instrument Panel

Amperage		Applicability
1	10A	Starter
2	—	—
3	15A	Engine device
4	15A	Ignition coil
5	15A	Tail, Illumination light
6	—	—
7	15A	Meter
8	—	—
9	10A	Room
10	—	—
11	20A	Front wiper
12	10A	Elec. IG.
13	15A	Stop light
14	20A	Door lock
15	15A	Backup turn

16	10A	Rear wiper
17	15A	Rear defogger (No.1)
18	15A	Rear defogger (No.2)
19	10A	Audio
20	15A	Cigarette lighter
21	10A	SRS (No.1)
22	10A	SRS (No.2)
23	20A	Rear wheel anti-lock
24	10A	Anti-lock brake system
Circuit breaker 30A		Power window

SRS: Supplemental Restraint System

Fuse Box: Engine Compartment

Amperage		Applicability
1	15A	Hazard Warning Light
2	10A	Horn
3	–	–
4	20A	Blower
5	10A	Air conditioner
6	–	–
7	–	–
8	10A	Headlight; left
9	10A	Headlight; right
10	10A	O ₂ Sensor
11	20A	Fuel pump
12	15A	ECM
13	15A	ABS
14	10A (L4-2.6L)	Fuel pump (No.2)
	15A	ABS

Light Bulbs

Application	Bulb No.	Quantity	Rating Candlepower
Front Lights			
Headlight – Halogen	9004	2	65/45 watts
Turn signal & Parking light	1034	2	3/32
Sidemarkers	194	2	2
Rear Lights			
Back-up	1156	2	32
License	–	2	5 watts
Tail, Stop & Sidemarkers	1157	2	3/32
Turn signal	1156	2	32
High-mounted stop light	–	4	5 watts
Interior Illumination			
A/C-heater cont.	74	1	1.4
Dome light	–	1	10 watts
Instrument cluster	158/74	3/6 or 2	2/1.4
Stop light	–	2	5 watts
Luggage light	–	1	10 watts
Step light	–	4	5 watts

Dimensions and Weights

	Model	2WD	4WD
Wheelbase	—	108.6 in. (2,760 mm)	
Overall Length	P225/75R16	183.8 in. (4,670 mm)	
	P245/70R16	184.6 in. (4,690 mm)	
Overall Width	P225/75R16	66.5 in. (1,690 mm)	
	P245/70R16	68.5 in. (1,740 mm)	
Overall Height (At curb Wt.)	P225/75R16	65.5 in. (1,660 mm)	
	P245/70R16	66.3 in. (1,685 mm)	
Tread Front	P225/75R16	56.7 in. (1,440 mm)	
	P245/70R16	57.6 in. (1,465 mm)	
Tread Rear	P225/75R16	56.9 in. (1,445 mm)	
	P245/70R16	57.9 in. (1,470 mm)	
GVWR	2.6L engine	4,550 lb (2,065 kg)	—
	3.2L engine	4,750 lb (2,160 kg)	5,000 lb (2,270 kg)

Note: GVWR — Gross Vehicle Weight Rating