

Front Suspension

Independent wishbone arms, torsion bar springs with stabilizer bar.

Front Wheel Alignment

Toe-in	2 ± 2 mm (0.08 in.)	—
Camber	$0^\circ \pm 30'$	No more than 30' side-to-side variation
Caster	$2^\circ 30' \pm 45'$	No more than 30' side-to-side variation

Rear Suspension

5-link, coil spring type with stabilizer bar and direct double-acting shock absorbers.

Rear Wheel Alignment

Toe-in	0 ± 5 mm (0.2 in.)
Camber	$0^\circ \pm 1^\circ$
Toe-Axis	$\pm 1^\circ$

Steering

Rack and pinion.

Service Brake

Hydraulic Front: Disc brake.

Rear: Self-adjusting drum brake, leading-trailing (2WD model).
Disc brake (4WD model).

Parking Brake

Mechanical, operating on rear wheels. (2WD model)

Mechanical, drum in disc, duo-servo, manual-adjusting, operating on rear wheels (4WD model).

Battery

Voltage (V)	12
Cold-cranking performance (Amp)	600
Reserve capacity (Min.)	125
BCI group no.	24

Rear Axle

Models	2WD	4WD
Gear ratio	4.300	4.300
Lubricant capacity	1.87 U.S. quarts (1.77 liters)	

Front Axle (4WD Model)

Gear ratio	4.300
Lubricant capacity	1.5 U.S. quarts (1.4 liters)

Shift-on-the-Fly System


Lubricant capacity	0.13 U.S. quarts (0.12 liters)
--------------------	--------------------------------

Wheels and Tires

Tire size	215/75R15 235/75R15	245/70R16
Wheel size	15 x 6.5 JJ	16 x 7 JJ
Tire pressure	29 (200)	26 (180)
Wheel nut tightening torque	87 lb·ft (118 N·m)	

Fuses

Fuse boxes are installed on the left side of the instrument panel and the right side of the engine compartment. Each fuse box contains spare fuse cartridges.

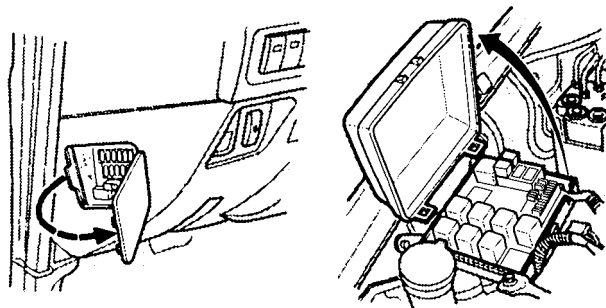

NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system. If you do not have a replacement fuse with the proper rating for the circuit, install one with a lower rating.

Fuse Box: Instrument Panel

Amperage		Applicability
1	10A	Starter
2	15A	Audio
3	15A	Cigarette lighter
4	10A	Rear wiper & washer
5	20A	Front wiper & washer
6	15A	Elec. IG
7	15A	Back-up/turn lights
8	15A	IG coil
9	15A	Engine IG
10	15A	Meter
11	15A	Rear defogger (No. 1)
12	15A	Rear defogger (No. 2)
13	10A	Mirror defogger
14	20A	Power door lock
15	15A	Stop light

16	10A	Dome light
17	15A	Tail/illum. light
18	10A	Anti-theft
19	—	—
20	20A	Accessory sockets
Circuit breaker 30A		Power window

Fuse Box: Engine Compartment

Amperage		Applicability
1	15A	Hazard Warning Light
2	10A	Horn
3	–	–
4	20A	Blower
5	10A	Air conditioner
6	–	–
7	–	–
8	10A	Headlight; left
9	10A	Headlight; right
10	10A	O ₂ Sensor
11	20A	Fuel pump
12	15A	ECM

Light Bulbs

Application	Bulb No.	Quantity	Rating Candlepower
Front Lights	9004	2	65/45 watts
Headlight – Halogen			
Fog	1034	2	55 watts 21/5
Turn signal & Parking light		2	
Sidemarkers			
Rear Lights	1156	2	27 watts
Back-up	–	2	5 watts
License	1157	2	27/8 watts
Tail, Stop & Sidemarkers	1156	2	27 5 watts
Turn signal		2	
High-mounted stop light		4	
Interior Illumination	74	1	1.4
A/C-heater cont.	–	1	7 watts
Dome light	158/74	3/6 or 2	2/1.4
Instrument cluster	–	2	5 watts
Stop light	–	1	5 watts
Luggage light	–	4	5 watts
Step light	–		

Dimensions and Weights

	Model	2WD	4WD
Wheelbase	—	106.4 in. (2,702 mm)	
Overall Length	Spare tire: under floor	176.7 in. (4,487 mm)	
	Spare tire: tailgate	183.4 in. (4,658 mm)	
Overall Width		70.4 in. (1,784 mm)	
Overall Height (At curb Wt.)	P235/75R15	68.5 in. (1,740 mm)	
	P245/70R16	68.8 in. (1,748 mm)	
Tread Front		59.6 in. (1,515 mm)	
Tread Rear		59.8 in. (1,520 mm)	
GVWR	—	4,700 lb (2,130 kg)	4,850 lb (2,200 kg)

Note: GVWR—Gross Vehicle Weight Rating