


Fuses

Fuse boxes are installed on the left side of the instrument panel and the right side of the engine compartment. Each fuse box contains spare fuse cartridges.

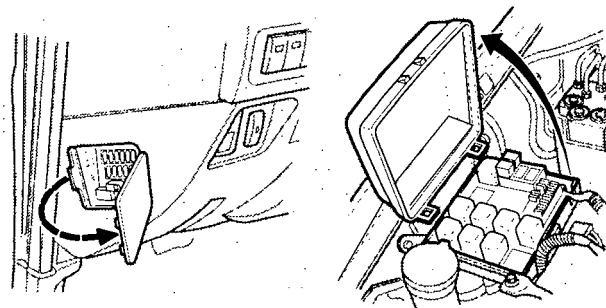

NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system. If you do not have a replacement fuse with the proper rating for the circuit, install one with a lower rating.

Fuse Box: Instrument Panel

Amperage		Applicability
1	15A	Meter
2	15A	Engine IG
3	15A	IG coil
4	15A	Back-up/turn lights
5	15A	Elec. IG
6	20A	Front wiper & washer
7	10A	Rear wiper & washer
8	15A	Cigarette lighter, Accessory power sockets
9	15A	Audio
10	10A	Starter
11	20A	Accessory sockets
12	—	—
13	10A	Anti-theft
14	15A	Tail/illum. light

15	10A	Dome light
16	15A	Stop light
17	20A	Power door lock
18	10A	Mirror defogger
19	15A	Rear defogger (No. 2)
20	15A	Rear defogger (No. 1)
21	Circuit breaker 30A	Power window
22	10A	SRS

Fuse Box: Engine Compartment

Amperage		Applicability
1	15A	Hazard Warning Light
2	10A	Horn
3	—	—
4	20A	Blower
5	10A	Air conditioner
6	—	—
7	—	—
8	10A	Headlight; left
9	10A	Headlight; right
10	10A	O ₂ Sensor
11	20A	Fuel pump
12	15A	ECM

Light Bulbs

Application	Bulb No.	Quantity	Rating Candlepower
Front Lights	9004	2	65/45 watts
Headlight – Halogen		2	55 watts
Fog		2	21/5
Turn signal & Parking light		2	
Sidemarkers			
Rear Lights			
Back-up	1156	2	27 watts
License	—	2	5 watts
Tail, Stop & Sidemarkers	1157	2	27/8 watts
Turn signal	1156	2	27
High-mounted stop light	—	4	5 watts
Interior Illumination			
A/C-heater cont.	74	1	1.4
Dome light	—	1	7 watts
Instrument cluster	158/74	3/6 or 2	2/1.4
Stop light	—	2	5 watts
Luggage light	—	1	5 watts
Step light	—	4	5 watts

Dimensions and Weights

	Model	2WD	4WD
Wheelbase	—	106.4 in. (2,702 mm)	
Overall Length	Spare tire: under floor	176.7 in. (4,487 mm)	
	Spare tire: tailgate	183.4 in. (4,658 mm)	
Overall Width		70.4 in. (1,784 mm)	
Overall Height (At curb Wt.)	P235/75R15	68.5 in. (1,740 mm)	
	P245/70R16	68.8 in. (1,748 mm)	
Tread Front		59.6 in. (1,515 mm)	
Tread Rear		59.8 in. (1,520 mm)	
GVWR	—	4,700 lb (2,130 kg)	4,850 lb (2,200 kg)

Note: GVWR—Gross Vehicle Weight Rating