


Identification Numbers

Your vehicle has several identifying numbers located in various places.

The Vehicle Identification Number (VIN) is the 17-digit number your Acura dealer uses to register your vehicle for warranty purposes. It is also necessary for licensing and insuring your vehicle. The easiest place to find the VIN is on a plate fastened to the top of the dashboard. You can see it by looking through the windshield on the driver's side. It is also on the Certification label attached to the driver's doorjamb, and is stamped on the engine compartment bulkhead. The VIN is also provided in bar code on the Certification label.

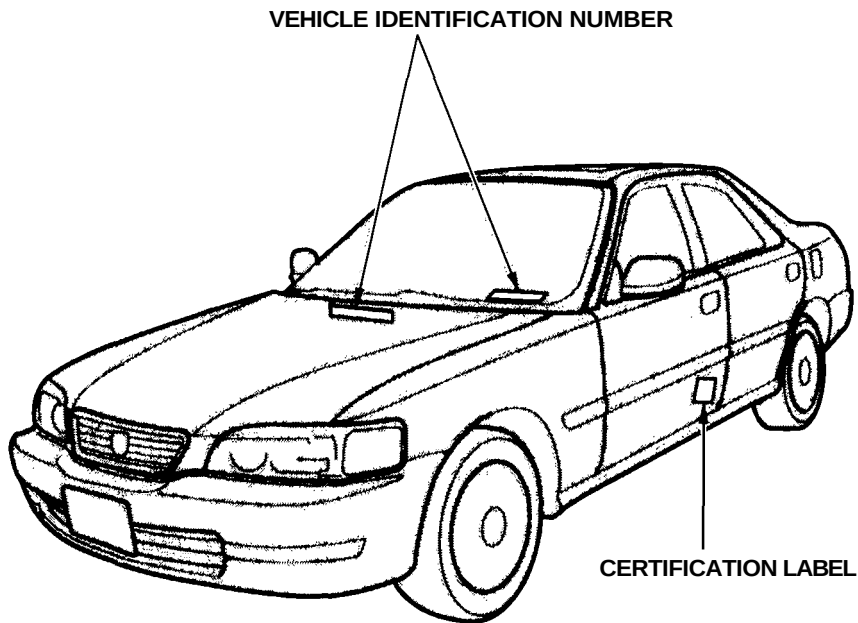

Identification Numbers

2.5 TL


The Engine Number is stamped into the engine block. It is on the rear.

3.2 TL


The Engine Number is stamped into the engine block. It is on the front left, below the valve cover.

The Transmission Number is on a label on top of the transmission.

2.5 TL

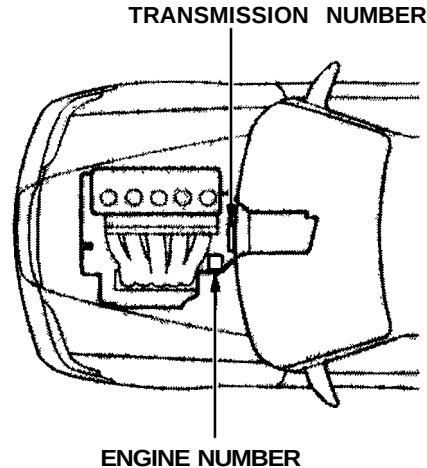

3.2 TL

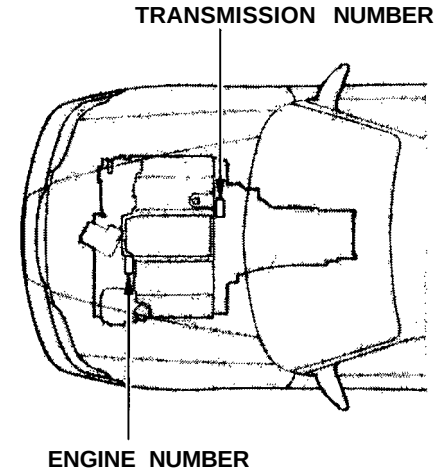

Specifications (2.5 TL)

Dimensions

Length	191.5 in (4,865 mm)
Width	70.3 in (1,785 mm)
Height	55.3 in (1,405 mm)
Wheelbase	111.8 in (2,840 mm)
Track	59.8 in (1,520 mm)
Front	
Rear	59.4 in (1,510 mm)

Weights

Gross vehicle weight rating	See the certification label attached to the driver's doorjamb.
-----------------------------	--

Air Conditioning

Refrigerant type	HFC-134a (R-134a)
Charge quantity	24.7–26.5 oz (700–750 g)
Lubricant type	ND-OIL8

Capacities

Fuel tank		Approx. 17.2 US gal (65 ℓ , 14.3 Imp gal)
Engine coolant	Change* ¹	1.37 US gal (5.2 ℓ , 1.14 Imp gal)
	Total	1.85 US gal (7.0 ℓ , 1.54 Imp gal)
Engine oil	Change* ²	
	Including filter	4.5 US qt (4.3 ℓ , 3.8 Imp qt)
	Without filter	4.2 US qt (4.0 ℓ , 3.5 Imp qt)
	Total	5.5 US qt (5.2 ℓ , 4.6 Imp qt)
Automatic transmission fluid	Change	2.9 US qt (2.7 ℓ , 2.4 Imp qt)
	Total	7.6 US qt (7.2 ℓ , 6.3 Imp qt)
Differential oil	Change	1.00 US qt (0.95 ℓ , 0.84 Imp qt)
	Total	1.11 US qt (1.05 ℓ , 0.92 Imp qt)
Windshield washer reservoir	U.S. Cars	2.6 US qt (2.5 ℓ , 2.2 Imp qt)
	Canada Cars	4.8 US qt (4.5 ℓ , 4.0 Imp qt)

* 1 : Including the coolant in the reserve tank and that remaining in the engine.

Reserve tank capacity:

0.18 US gal (0.7 l , 0.15 Imp gal)

* 2 : Excluding the oil remaining in the engine.

Specifications (2.5 TL)

Lights

Headlights	12 V — 60/55 W (HB2)
Front turn signal lights	12 V — 21 W
Front parking lights	12 V — 5 W
Rear turn signal lights	12 V — 21 W
Stop/Taillights	12 V — 21/5 W
Front fog lights	12 V — 55 W
High mount brake light	12 V — 21 W
Front side marker lights	12 V — 3 CP
Rear side marker lights	12 V — 3 CP
Back-up lights	12 V — 21 W
License plate lights	12 V — 8 W
Interior lights Front	12 V — 5 W
Center	12 V — 8 W
Trunk light	12 V — 5 W
Door courtesy lights	12 V — 3.4 W
Vanity mirror light	12 V — 2 W

Battery

Capacity	12 V — 52 AH/5 HR
----------	-------------------

Fuses

Interior	See page 254 or the fuse label attached to the inside of the fuse box door under the dashboard.
Under-hood	See page 253 or the fuse box cover.

Engine

Type	Water cooled 4-stroke SOHC 5-cylinder gasoline engine
Bore x Stroke	3.35 x 3.40 in (85.0 x 86.4 mm)
Displacement	150 cu-in (2,451 cm ³)
Compression ratio	9.6 : 1
Spark plugs	See spark plug maintenance section page 191.

Alignment

Toe-in	Front	0.00 in (0.0 mm)
	Rear	0.08 in (2.0 mm)
Camber	Front	0°
	Rear	-0°30'
Caster	Front	2°07'

Tires

Size	Front/Rear	205/60R15 91H
	Spare	T135/70D15
Pressure	Front	30 psi (210 kPa , 2.1 kgf/cm ²)
	Rear	29 psi (200 kPa , 2.0 kgf/cm ²)
	Spare	60 psi (420 kPa , 4.2 kgf/cm ²)

Specifications (3.2 TL)

Dimensions

Length	191.7 in (4,870 mm)
Width	70.9 in (1,800 mm)
Height	55.7 in (1,415 mm)
Wheelbase	111.8 in (2,840 mm)
Track	61.0 in (1,550 mm)
Front	
Rear	59.4 in (1,510 mm)

Weights

Gross vehicle weight rating	See the certification label attached to the driver's doorjamb.
-----------------------------	--

Air Conditioning

Refrigerant type	HFC-134a (R-134a)
Charge quantity	24.7 – 26.5 oz (700 – 750 g)
Lubricant type	ND-OIL8

Capacities

Fuel tank		Approx. 17.2 US gal (65 ℓ , 14.3 Imp gal)
Engine coolant	Change* ¹	0.85 US gal (3.2 ℓ , 0.70 Imp gal)
	Total	2.03 US gal (7.7 ℓ , 1.69 Imp gal)
Engine oil	Change* ²	
	Including filter	5.0 US qt (4.7 ℓ , 4.1 Imp qt)
	Without filter	4.2 US qt (4.0 ℓ , 3.5 Imp qt)
	Total	5.6 US qt (5.3 ℓ , 4.7 Imp qt)
Automatic transmission fluid	Change	3.2 US qt (3.0 ℓ , 2.6 Imp qt)
	Total	9.1 US qt (8.6 ℓ , 7.6 Imp qt)
Differential oil	Change	1.11 US qt (1.05 ℓ , 0.92 Imp qt)
	Total	1.16 US qt (1.10 ℓ , 0.97 Imp qt)
Windshield washer reservoir	U.S. Cars	2.6 US qt (2.5 ℓ , 2.2 Imp qt)
	Canada Cars	6.3 US qt (6.0 ℓ , 5.3 Imp qt)

* 1 : Including the coolant in the reserve tank and that remaining in the engine.

Reserve tank capacity:

0.172 US gal (0.65 l , 0.143 Imp gal)

* 2 : Excluding the oil remaining in the engine.

Specifications (3.2 TL)

Lights

Headlights	12 V — 60/55 W (HB2)
Front turn signal lights	12 V — 21 W
Front parking lights	12 V — 5 W
Rear turn signal lights	12 V — 21 W
Stop/Taillights	12 V — 21/5 W
Front fog lights	12 V — 55 W
High mount brake light	12 V — 21 W
Front side marker lights	12 V — 3 CP
Rear side marker lights	12 V — 3 CP
Back-up lights	12 V — 21 W
License plate lights	12 V — 8 W
Interior lights Front	12 V — 5 W
Center	12 V — 8 W
Trunk light	12 V — 5 W
Door courtesy lights	12 V — 3.4 W
Vanity mirror light	12 V — 2 W

Battery

Capacity	12 V — 52 AH/5 HR
----------	-------------------

Fuses

Interior	See page 266 or the fuse label attached to the inside of the fuse box door under the dashboard.
Under-hood	See page 255 or the fuse box cover.

Engine

Type	Water cooled 4-stroke SOHC V-6 gasoline engine
Bore x Stroke	3.54 x 3.31 in (90 x 84 mm)
Displacement	196 cu-in (3,206 cm ³)
Compression ratio	9.6 : 1
Spark plugs	See spark plug maintenance section page 194.

Alignment

Toe	Front	out 0.04 in (1.0 mm)
	Rear	in 0.12 in (3.0 mm)
Camber	Front	0°
	Rear	— 0°30'
Caster	Front	3°40'

Tires

Size	Front/Rear	205/65R15 94V
	Spare	T135/90D15
Pressure	Front/Rear	29 psi (200 kPa , 2.0 kgf/cm ²)
	Spare	60 psi (420 kPa , 4.2 kgf/cm ²)