


Identification Numbers

Your car has several identifying numbers located in various places.


The Vehicle Identification Number (VIN) is the 17-digit number your Acura dealer uses to register your car for warranty purposes. It is also necessary for licensing and insuring your car. The easiest place to find the VIN is on a plate fastened to the top of the dashboard. You can see it by looking through the windshield on the driver's side. It is also on the Certification label attached to the driver's doorjamb, and is stamped on the engine compartment bulkhead. The VIN is also provided in bar code on the Certification label.

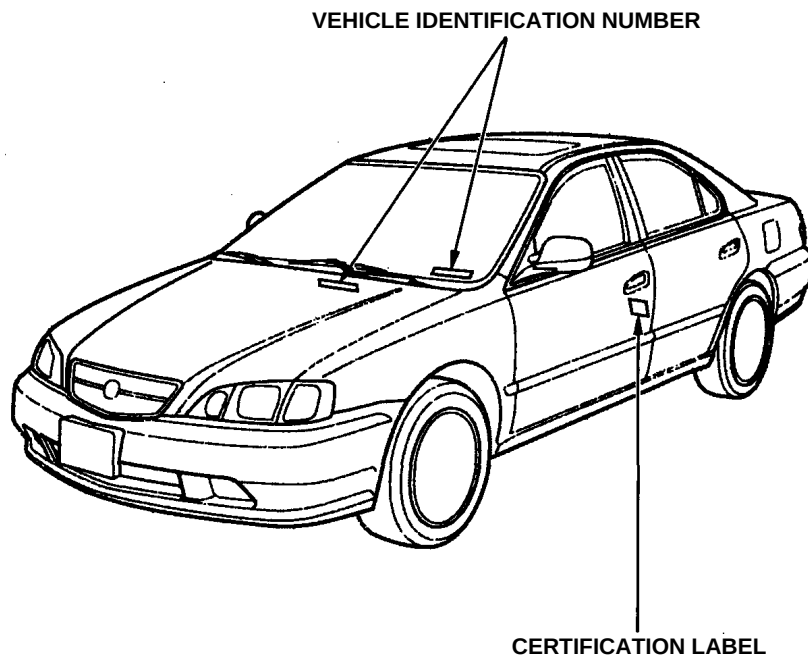

Identification Numbers

The Engine Number is stamped into the engine block. It is on the front.

The Transmission Number is on a label on top of the transmission.

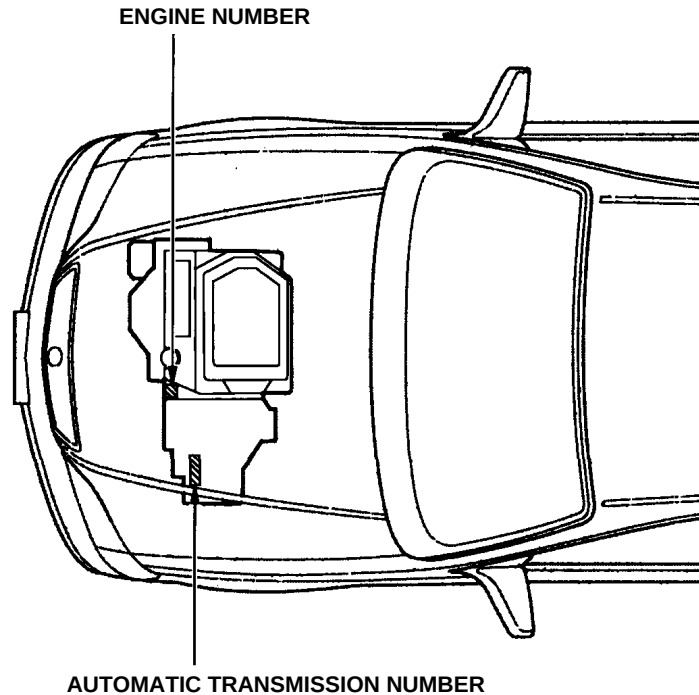

Specifications

Dimensions

Length	192.9 in (4,900 mm)
Width	70.3 in (1,785 mm)
Height	55.7 in (1,415 mm)
Wheelbase	108.1 in (2,745 mm)
Track	61.2 in (1,555 mm)
Front	
Rear	60.4 in (1,535 mm)

Weights

Gross vehicle weight rating	See the certification label attached to the driver's door.
-----------------------------	--

Air Conditioning

Refrigerant type	HFC-134a (R-134a)
Charge quantity	25-27 oz (700-750 g)
Lubricant type	ND-OIL8

Capacities

Fuel tank	Approx. 17.17 US gal (65.0 l , 14.30 Imp gal)
-----------	--

Capacities

Engine coolant	Change* ¹ Total	1.48 US gal (5.6 l , 1.23 Imp gal) 1.98 US gal (7.5 l , 1.65 Imp gal)
Engine oil	Change* ¹ Including filter	4.6 US qt (4.4 l , 3.9 Imp qt)
	Without filter	4.2 US qt (4.0 l , 3.5 Imp qt)
	Total	5.3 US qt (5.0 l , 4.4 Imp qt)
Automatic transmission fluid	Change Total	3.0 US qt (2.8 l , 2.5 Imp qt) 7.5 US qt (7.1 l , 6.2 Imp qt)
Windshield washer reservoir	U.S. Cars Canada Cars	2.6 US qt (2.5 l , 2.2 Imp qt) 4.8 US qt (4.5 l , 4.0 Imp qt)

★ 1 : Including the coolant in the reserve tank and that remaining in the engine.

Reserve tank capacity: 0.16 US gal (0.6 l , 0.13 Imp gal)

★ 2 : Excluding the oil remaining in the engine.

Specifications

Lights

Headlights*	12V - 60 W (HB3) (High beam)
Front turn signal/Side marker lights	12 V - 24/2.2 CP
Rear turn signal lights	12V - 21 W
Stop/Taillights	12 V - 21/5 W
High-mount brake light	12V - 21 W
Back-up lights	12V - 21 W
License plate lights	12 V - 3CP
Ceiling light	12V - 7W
Trunk lights	12V - 5W
Door courtesy lights	12 V - 2CP
Vanity mirror light	12V - 1.1 W
Map light	12 V - 4CP

*Low beam headlight bulbs are a type of high voltage discharge tube

Battery

Capacity	12V- 65 AH/20 HR
----------	------------------

Fuses

Interior	See page 270 or the fuse label attached to the inside of the fuse box door on each side of the dashboard.
Under-hood	See page 269 or the fuse box cover.

Engine

Type	Water cooled 4-stroke SOHC VTEC 6-cylinder (V6), gasoline engine
Bore x Stroke	3.50 X 3.39 in (89.0 x 86.0 mm)
Displacement	195.8 cu-in (3,210 cm ³)
Compression ratio	9.8:1
Spark plugs	See spark plug maintenance section pages 186 and 188 .

Alignment

Toe-in	Front	0.00 in (0.0 mm)
	Rear	0.08 in (2.0 mm)
Camber	Front	0°
	Rear	-0°30'
Caster	Front	3°00'

Tires

Size	Front/Rear	P205/60R16 91V
	Spare	T135/80R16
Pressure	Front/Rear	32 psi (220 kPa , 2.2 kgf/cm ²)
	Spare	60 psi (420 kPa , 4.2 kgf/cm ²)

Tire Information

Tire Size Designation

A tire's sidewall is marked with a tire size designation. You will need this information when selecting replacement tires for your vehicle. The following explains what the letters and numbers in the tire size designation mean.

(Example tire size designation)
P205/60R16 91V

P — Applicable vehicle type (tires marked with the prefix "P" are intended for use on passenger cars; however, not all tires have this marking).

205 — Tire width in millimeters.

60 — Aspect ratio. The tire's section height as a percentage of its width.

R — Tire construction code (Radial).

16 — Rim diameter in inches.

91 — Load Index, a numerical code associated with the maximum load the tire can carry.

V — Speed Symbol. See the speed rating chart in this section for additional information.

Wheel Size Designation

Wheels are also marked with important information that you need if you ever have to replace one. The following explains what the letters and numbers in the wheel size designation mean.

(Example wheel size designation)
16 x 6-1/2 JJ

16 — Rim diameter in inches.

6-1/2 — Rim width in inches.

JJ — Rim contour designation.

Tire Speed Ratings

The chart below shows many of the different speed ratings currently being used for passenger vehicle tires. The speed symbol is part of the tire size designation on the sidewall of the tire. This symbol corresponds to that tire's designed maximum safe operating speed.

Speed Symbol or Category	Maximum Speed
Q	99mph(160km/h)
S	112 mph (180 km/h)
T	118 mph (190 km/h)
H	130 mph (210 km/h)
V	149 mph (240 km/h)
W	168 mph (270 km/h)
ZR	Over 149 mph (240 km/h)