

	Airbags		Stored Gas Inflator		Seat Belt Pretensioner		SRS Control Unit
	Gas Strut / Preloaded Spring		High Strength Zone		Battery Low Voltage		Fuel Tank Content Gasoline / Ethanol
	High-Voltage Battery Pack		High-Voltage Power Cable / Component		High-Voltage Disconnect (Cutting Solution)		Reinforcement

## 1. Identification / Recognition



Lack of engine noise does not mean vehicle is off: vehicle movement capability exists until vehicle is fully shut down. Always wear appropriate PPE.

### Emblems & Badging

Front



Back

Honda

Prelude




## 2. Immobilization / Stabilization / Lifting

### Immobilize Vehicle



1. Block the wheels and pull the parking brake switch up. The **BRAKE** indicator will illuminate.
2. Press the brake pedal and press the **P** button.

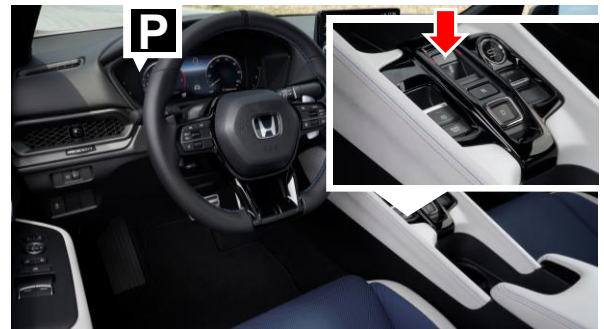


### Lifting Points





Front Lifting  
(If Necessary)




Front Tow Hook

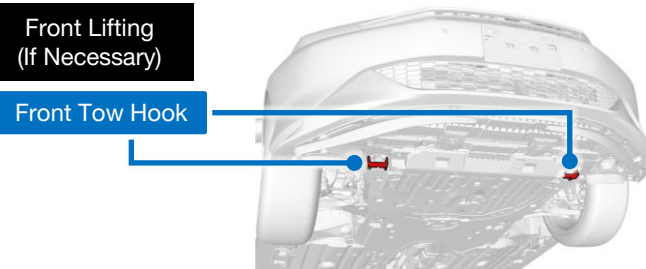

Recommended  
Lifting Points






Floor Jack  
Lifting Points

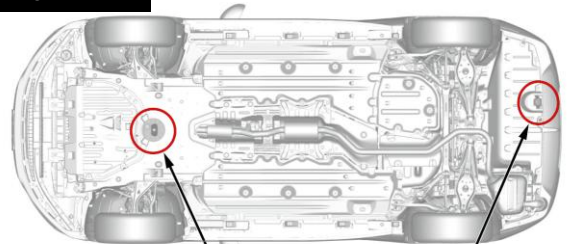


3. Disable Direct Hazards / Safety Regulations

Engine Bay Access (How to Open the Hood)

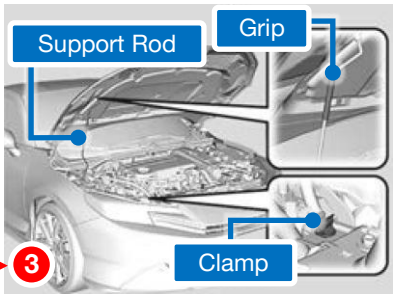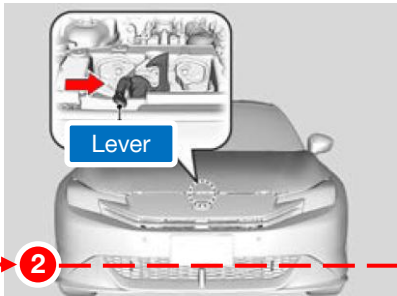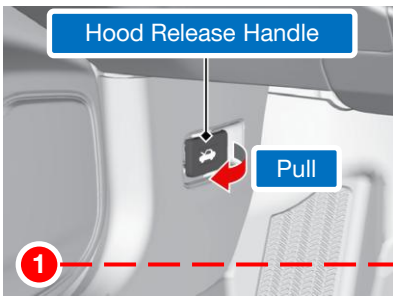


Preferred Method

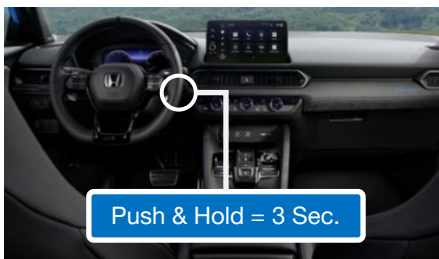

20 Feet




Wait 3 minutes

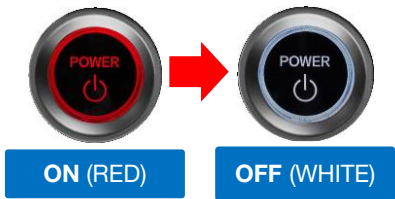


1 2 3 (If Necessary)

Alternative Method

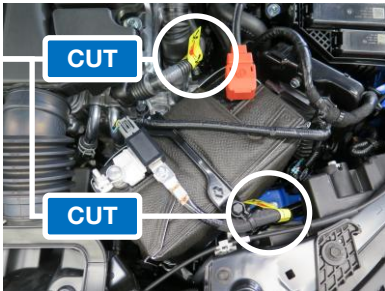






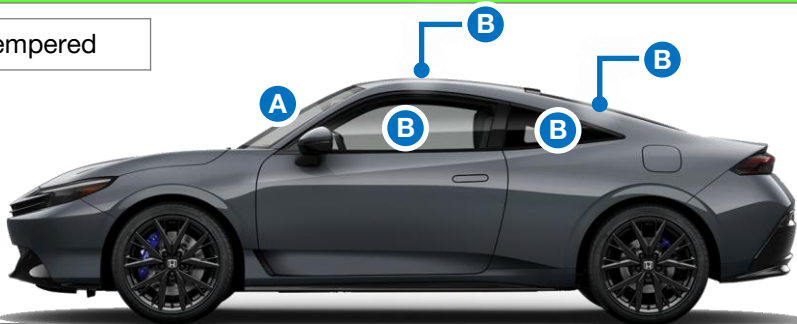









4. Access to Occupants

A Laminated B Tempered














## 5. Stored energy / Liquids / Gases / Solids

	<b>12-Volt Battery</b> Lead Acid	    
	<b>High-Voltage Battery</b> 262 V, Lithium-Ion	    
	<b>Gasoline Tank</b> 10.6 US gal (40.0L)	 

## 6. In Case of Fire

    		<b>Potential for battery reignition</b>
 Suitable extinguishing media: Plenty of water, carbon dioxide gas, nitrogen gas, chemical powder fire extinguishing medium and fire foam.	If it is safe to do so, open the passenger's door and direct water from into the high-voltage battery vent under the rear seat cushion.	
 ABC powder fire extinguisher may be used as an alternative.		









## 7. In Case of Submersion

Aside from severe damage to the vehicle, there is no risk of an electric shock from touching the vehicle's body or framework - in or out of the water. If the high-voltage battery was submerged, you may hear noises from the battery as the cells are being discharged from shorting.

If submerged or partly submerged in water, first pull the vehicle out of the water, then shut down the high-voltage system.

**NOTE:** If touching high-voltage cables and/or other high-voltage components is unavoidable, personal protective equipment (insulating gloves, goggles, and boots) should always be worn.









## 8. Towing / Transportation / Storage

 	 	 
--	---	---

## 9. Important Additional Information

For more detail information, refer to the applicable emergency response guide at [www.techinfo.honda.com](http://www.techinfo.honda.com)

## 10. Explanation of Pictograms Used

	Power Switch		Lifting Points		Hood Release / Opener Control		Keyless Operation Key Distance
	Electricity or Dangerous Voltage		General Warning		Use Water to Extinguish Fire		Use ABC Powder to Extinguish Fire