

## Fuses, Fuse Locations


### Fuses

To check and replace fuses, follow the instructions in the Civic Sedan owner's manual.

Since your vehicle's interior fuses are different from the Civic Sedan fuses, determine from the chart or the diagram on the fuse label, which fuse or fuses control that device.

### Fuse Locations

#### INTERIOR FUSE BOX

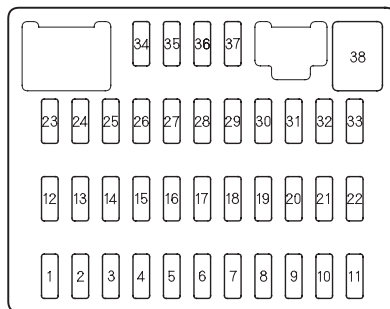

No.	Amps.	Circuits Protected
1	7.5 A	Power Window
2	15 A	Fuel Pump
3	10 A	Alternator
4	7.5 A	ABS Unit
5	15 A	Injection
6	—	Not Used
7	—	Not Used
8	—	Not Used
9	7.5 A	ODS
10	7.5 A	METER
11	10 A	SRS
12	10 A	Right Headlight High
13	10 A	Left Headlight High
14	7.5 A	Small (Interior)
15	7.5 A	Small (Exterior)
16	10 A	Right Headlight Low

No.	Amps.	Circuits Protected
17	10 A	Left Headlight Low
18	20 A	Headlight High Main
19	15 A	Small (Main)
20	—	Not Used
21	20 A	Headlight Low Main
22	—	Not Used
23	—	Not Used
24	—	Not Used
25	20 A	Door Lock
26	20 A	Driver's Power Window
27	—	Not Used
28	—	Not Used
29	15 A	ACC
30	20 A	Passenger's Power Window
31	—	Not Used
32	20 A	Right Rear Power Window
33	20 A	Left Rear Power Window
34	—	Not Used
35	7.5 A	ACC Radio
36	10 A	HAC
37	7.5 A	Daytime Running Light
38	30 A	Front Wiper

# Specifications

## Dimensions

Length	176.7 in (4,489 mm)
Width	69.0 in (1,752 mm)
Height	56.5 in (1,435 mm)
Wheelbase	106.3 in (2,700 mm)
Track	Front 59.0 in (1,499 mm)
	Rear 60.2 in (1,528 mm)

## Weights

Gross vehicle weight rating	See the certification label attached to the driver's doorjamb.
-----------------------------	--

## Engine

Type	Water cooled 4-stroke SOHC i-VTEC 4-cylinder compressed natural gas engine
Bore x Stroke	3.19 x 3.44 in (81.0 x 87.3 mm)
Displacement	110 cu-in (1,799 cm <sup>3</sup> )
Compression ratio	12.5 : 1
Spark plugs	NGK: IFR7F-8DS

## Capacities

Fuel tank service pressure	3,600 psi (24,800 kPa) at 70°F (21°C)
Fuel tank capacity	3,000 psi: 7.2 gasoline gallons equivalent (GGE) 3,600 psi: 8.0 gasoline gallons equivalent
Engine coolant	Change* <sup>1</sup> 1.37 US gal (5.2 ℓ) Total 1.77 US gal (6.7 ℓ)
Engine oil	Change* <sup>2</sup> Including filter 3.9 US qt (3.7 ℓ) Without filter 3.7 US qt (3.5 ℓ) Total 4.8 US qt (4.5 ℓ)
Automatic transmission fluid	Change 2.5 US qt (2.4 ℓ) Total 6.2 US qt (5.9 ℓ)
Windshield washer reservoir	2.6 US qt (2.5 ℓ)

\* 1 : Including the coolant in the reserve tank and that remaining in the engine.

Reserve tank capacity: 0.11 US gal (0.4 ℓ)

\* 2 : Excluding the oil remaining in the engine.

## Air Conditioning

Refrigerant type	HFC-134a (R-134a)
Charge quantity	14.1 – 15.9 oz (400 – 450 g)
Lubricant oil type	SP-10

## Lights

Headlights	High	12 V – 60 W (HB3)
	Low	12 V – 51 W (HB4)
Front turn signal/side marker/ Parking lights		12 V – 21/5 W
Rear turn signal lights		12 V – 21 W
Stop/Taillights		12 V – 21/5 W
Rear side marker lights		12 V – 2 CP
Back-up lights		12 V – 21 W
Taillights		12 V – 3 CP
High-mount brake light		12 V – 21 W
License plate lights		12 V – 5 W
Ceiling light		12 V – 8 W
Spotlights		12 V – 8 W
Trunk light		12 V – 5 W

## Battery

Capacity	12 V – 36Ah/5HR
	12 V – 45Ah/20HR

## Fuses

Interior	See page 31 or the fuse label attached to the driver's lower corner panel.
Under-hood	See <b>Fuses</b> in the Civic Sedan owner's manual.

## Alignment

Toe-in	Front	0.00 in (0.0 mm)
	Rear	0.08 in (2.0 mm)
Camber	Front	0°
	Rear	– 1°30'
Caster	Front	7°00'

## Tires

Size	Front/Rear	P195/65R15 89H
	Spare	T125/70D15 95M
Pressure	Front/Rear	30 psi (210 kPa , 2.1 kgf/cm <sup>2</sup> )
	Spare	60 psi (420 kPa , 4.2 kgf/cm <sup>2</sup> )

## Authorized Manuals

---

### Purchasing Factory Authorized Manuals

The publications shown below can be purchased from Helm Incorporated. You can order in any of three ways:

- Detach and mail the order form on the right half of this page
- Call Helm Inc. at 1-800-782-4356 (credit card orders only)
- Go online at [www.helminc.com](http://www.helminc.com)

If you are interested in other years or models, contact Helm Inc. at 1-800-782-4356.

Publication Form Number	Form Description	Price Each*
61SNA00	2006 Honda Civic 2/4 Door Service Manual	\$75.00
61SNA02	2006 Civic GX 4 Door Service Manual Supplement	\$35.00
61SNA00EL	2006 Honda Civic 2/4 Door Electrical Troubleshooting Manual	\$50.00
61SNA30	2006 Honda Civic 2/4 Door Body Repair Manual	\$44.00
31SNF900	2006 Honda Civic GX 4 Door Owner's Manual Supplement	\$25.00
31SNA600	2006 Honda Civic 4 Door Owner's Manual	\$35.00
31SNAM00	2006 Honda Civic Honda Service History	\$12.00
31SNAQ00	2006 Honda Civic 4 Door Quick Start Guide	\$12.00
HON-R	Order Form for Previous Years- Indicate Year and Model Desired	FREE
* Prices are subject to change without notice and without incurring obligation.		

*Valid only for sales within the U.S. Canadian owners should contact their authorized Honda dealer.*

**ORDER TOLL FREE: 1-800-782-4356**

**(NOTE: For Credit Card Holder Orders Only)**

Monday-Friday 8:00 A.M. — 6:00 P.M. EST

**MINIMUM CREDIT CARD PURCHASE \$10.00**

**OR**

By completing this form you can order the materials desired. You can pay by check or money order, or charge to your credit card. Mail to Helm Incorporated at the address shown on the back of the order form.

<b>2006 HONDA</b>	PUBLICATION NUMBER	VEHICLE MODEL		Qty	Price Each *	Total Price	
		Name	Year				
* Prices are subject to change without notice and without incurring obligation.  Orders are mailed within 10 days. Please allow adequate time for delivery.					TOTAL MATERIAL		
					Mich. Purchases Add 6% Sales Tax		
					HANDLING CHARGE		\$6.95
					GRAND TOTAL		

## 36

PAYMENT

☐ Check or money order enclosed payable to Helm Inc — U.S. funds only.  
Do not send cash

☐ MasterCard      ☐ VISA      ☐ Check here if your billing address is different from the shipping address shown above.

Account Number \_\_\_\_\_ Expiration: Mo. Yr. \_\_\_\_\_  

																	-
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---

CUSTOMER SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_

**HELM** P.O. BOX 07280-DETROIT, MICHIGAN 48207-1-800-782-4356