










	Airbag		Stored Gas Inflator		Seat Belt Pretensioner		SRS Control Unit
	Gas Preloaded spring		High Strength Zone		Battery Low Voltage		High Pressure Hydrogen
	High Voltage Battery Pack		High Voltage Power Cable / Component		High-Voltage Disconnect (Cutting Solution)		Reinforcement

1. Identification / Recognition



Lack of engine noise does not mean vehicle is off: vehicle movement capability exists until vehicle is fully shut down. Always wear appropriate PPE.

Emblems & Badging

Front



Back

CR-V



e:FCEV

2. Immobilization / Stabilization / Lifting

Immobilize Vehicle


1. Block the wheels and pull the parking brake switch up. The **BRAKE** indicator will illuminate.
2. Press the brake pedal and press the **P** button.




Lifting Points

Front Lifting
(If Necessary)




Front Tow Hook

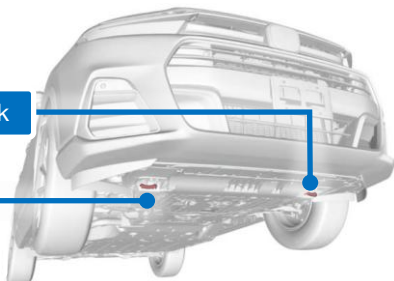

Recommended
Lifting Points


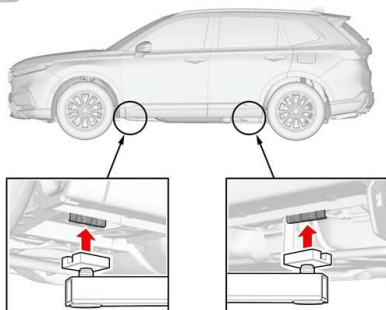


Floor Jack
Lifting Points



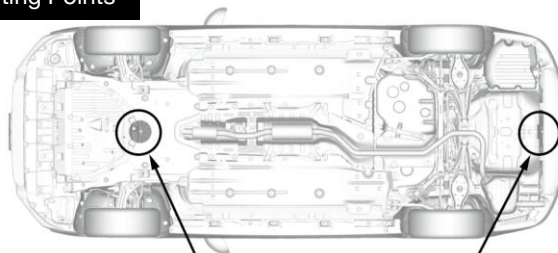


3. Disable Direct Hazards / Safety Regulations


Engine Bay Access (How to Open the Hood)

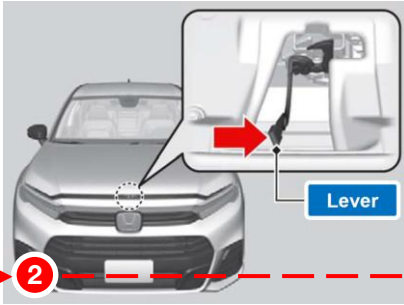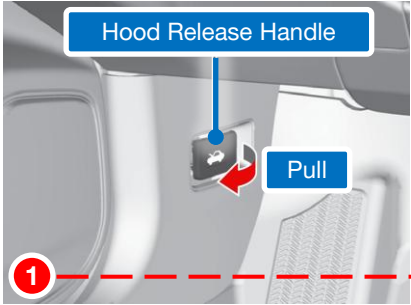

Preferred Method

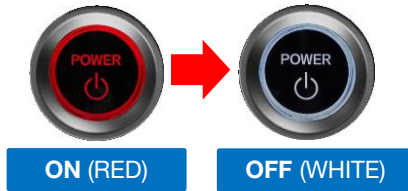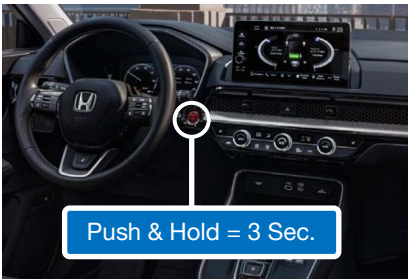


Alternative Method

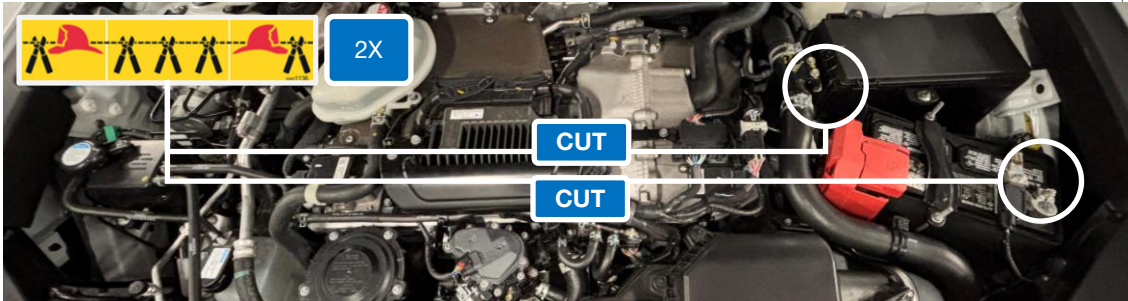






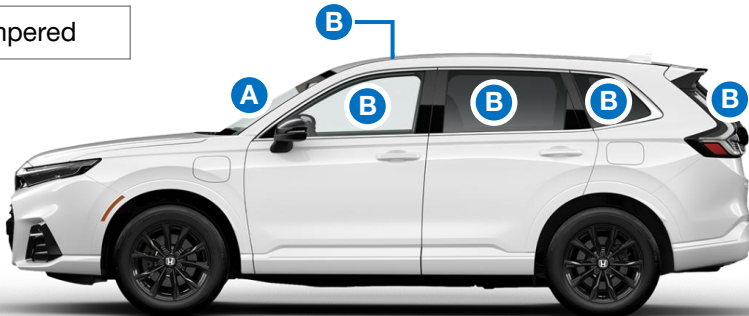










4. Access to Occupants










A	Laminated	B	Tempered
---	-----------	---	----------



5. Stored energy / Liquids / Gases / Solids

	12-Volt Battery Lead Acid	    
	High-Voltage Battery 347.5V, Lithium-Ion	    
	Hydrogen Gas Tank 29.83 US gal (112.9 L) @ 70 Mpa (10,152 psi)	  

6. In Case of Fire

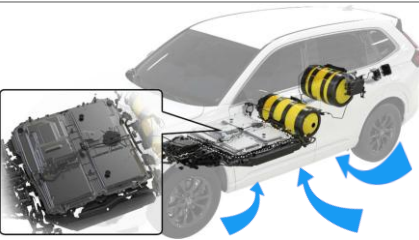    		Potential for battery reignition
 <p>Suitable extinguishing media: Plenty of water, carbon dioxide gas, nitrogen gas, chemical powder fire extinguishing medium and fire foam.</p>  <p>ABC powder fire extinguisher may be used as an alternative.</p>	<p>If it is safe to do so, direct water into the high-voltage battery area from underneath the vehicle between the front and rear tires.</p> 	
<p>NOTE: The TPRD (Thermally-activated Pressure Relief Device) may relieve hydrogen gas from each of the tanks directed under the rear of the car to the atmosphere when exposed to temperatures above 230°F (110°C). Hydrogen gas may be expelled for up to 5 minutes for tanks to fully deplete. You may hear a hissing or roaring noise as hydrogen expels out.</p>		

7. In Case of Submersion

Aside from severe damage to the vehicle, there is no risk of an electric shock from touching the vehicle’s body or framework - in or out of the water. If the high-voltage battery was submerged, you may hear noises from the battery as the cells are being discharged from shorting.

If submerged or partly submerged in water, first pull the vehicle out of the water, then shut down the high-voltage system.

NOTE: If touching high-voltage cables and/or other high-voltage components is unavoidable, personal protective equipment (insulating gloves, goggles, and boots) should always be worn.









8. Towing / Transportation / Storage

 	 	 
--	---	---

9. Important Additional Information

For more detail information, refer to the applicable emergency response guide at www.techinfo.honda.com

10. Explanation of Pictograms Used

	Power Switch		Lifting Points		Hood Release / Opener Control		Keyless Operation Key Distance
	Electricity or Dangerous Voltage		General Warning		Use Water to Extinguish Fire		Use ABC Powder to Extinguish Fire